



ROEMHELD
HILMA ▪ STARK

CATALOGUE

R-MAG Magnetic Clamping Systems



**For every application
a suitable solution:**


Sheet metal forming

Injection moulding
machines

Rubber molding presses

Mould carriers and
special applications

Die casting machines

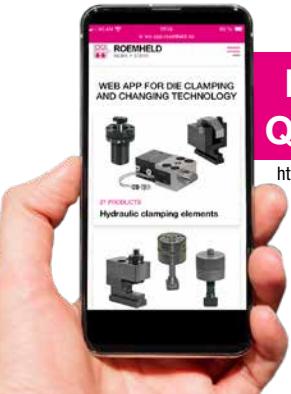

**Discover the
QDC app now!**

<https://wz-app.roemheld.de/en/home>



www.roemheld.com

ws.roemheld.com


wz.roemheld.com

mh.roemheld.com



Advantages of Die Clamping Systems

Why die clamping systems?

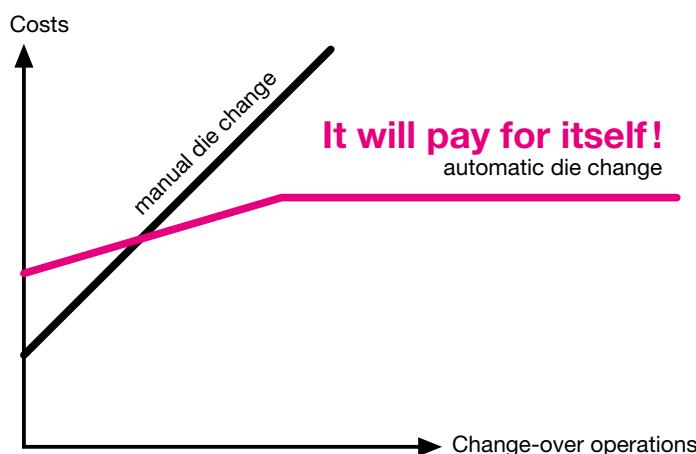

Innovative technology and many years of experience are the basis for our range of die clamping and changing systems.

Rationalise your operation by using automatic die changing systems.

Increased productivity

- more capacity thanks to reduced set-up times
- less downtime, e.g. due to tool breakage or reworking the die
- short test period

Automation

- power-operated elements
- monitoring elements, in particular for pressure and position
- short cycles thanks to automatic triggering of functions
- integration with process monitoring and control

Increase in quality

- consistent quality
- repeatability of die position
- low-distortion clamping

Operating facility


- operate under extreme circumstances (high temperature, spray)
- clamping in barely accessible positions without any problems
- clamping using high clamping forces
- dies may be changed by relatively unskilled workers
- repeatable die change process

Efficiency

- short set-up times even for small batches, smaller stock of parts
- simplified die change, also for the machine operator
- fewer jigs and fixtures required
- enhanced tool life as a result of less wear
- reduced run-in period for moulds and dies, i.e. fewer test pieces and less time required

Reduced rate of wear

- uniform and low-distortion clamping with high clamping forces
- compensating clamping force (elasticity)
- repeatable positioning and clamping process
- optimum selection of clamping points

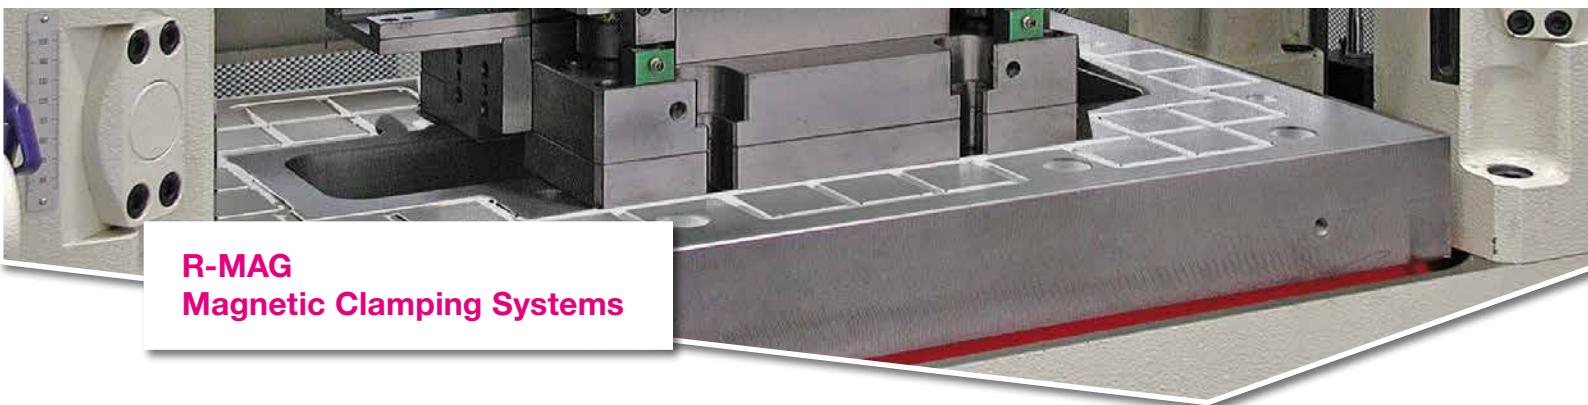


Magnetic Clamping Technology



9.1132
Magnetic Clamping Systems
for Sheet Metal Forming
R-MAG-M
operating temperature
up to 100°C



9.1134
Magnetic Clamping Systems
for Injection Moulding Machines
R-MAG-P
operating temperature
up to 150°C

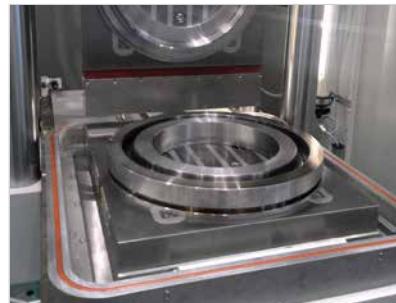

9.1136
Magnetic Clamping Systems
for Rubber Moulding Presses
R-MAG-R
operating temperature
up to 230°C



9.1138
Magnetic Clamping Systems
for Mould Carriers
and Special Applications
R-MAG-F
operating temperature
up to 100°C



9.1140
Magnetic Clamping Systems
for Die Casting Machines
R-MAG-D
operating temperature
up to 200°C



Accessories and Alternative
Clamping Technology
for R-MAG Magnetic Clamping
Systems



R-MAG-M Magnetic Clamping System for Sheet Metal Forming

Operating temperature up to 100 °C



Advantages

- **QUICK** – Dies are clamped in one second at the touch of a button
- **PROFITABLE** – Setup cost optimisation from die change that takes only a few minutes
- **FLEXIBLE** – Die standardization no longer required
- **ERGONOMIC** – Safe die handling with ease
- **RELIABLE** – Distortion-free and full-surface retention force even if power fails
- **SAFE** – Various sensors monitor the entire clamping cycle

OUR HIGHLIGHTS

Long pole technology with:

- Extremely high clamping forces
- Clamping force display
- Interchangeable magnetic poles (without grinding)
- All-metal surface

Application

R-MAG-M magnetic clamping systems are used primarily for the automatic clamping of different dies on sheet metal forming presses and automatic punching machines.

Description

With magnetic clamping systems, the moulds are magnetically clamped or unclamped at the push of a button within a few seconds.

Since permanent magnets generate the force of the magnetic clamping plates, electric clamping is only required to magnetize the plates.

The magnetic clamping plates are de-energized in clamped condition and thus absolutely safe in case of power failure.

Additionally, the complete clamping cycle is monitored by different sensors, thus guaranteeing reliable die clamping.

Scope of system and delivery

R-MAG-M magnetic clamping systems are delivered as complete clamping systems with all required system components. The essential components of a system are:

- two magnetic clamping plates
- electric control in a splash-proof control box
- modern 8" colour touch panel
- required electrical connection cables

Customised versions

All R-MAG magnetic clamping systems are customized and manufactured to meet specific requirements.

For example, the size and pole technology of the magnetic clamping plates are selected according to the application and the machine.

Please contact us.


High safety standard thanks to:

- Inductive position monitoring of the die contact (switching distance 0.2 mm, adjustable)
- Redundant system with additional "flux sensor"
- Even the smallest die movements are monitored and reported
- Monitoring of correct magnetisation/power contacts
- Permanent temperature monitoring in the plate (overload protection)
- Standard interface according to EN 201/289 and Euromap

Technical Data

| | | |
|--------------------------------------|-----------------------------|--------------|
| Surface of the magnetic plate | Metallic, smooth and sturdy | |
| Size of the magnetic clamping plates | Customised | |
| Pole technology | Long pole and square pole | |
| Plate thickness | | |
| Long pole <input type="checkbox"/> | [mm] | 55 |
| Square pole <input type="checkbox"/> | [mm] | 38 or 55 |
| Max. temperature | [°C] | 100 |
| Magnetic retention force (per pole) | | |
| Long pole 232 x 68 mm | [kN] | 21 (2100 kg) |
| Square pole 55 x 55 mm | [kN] | 2 (200 kg) |
| Magnetic penetration depth | [mm] | 20 |


Installation on a sheet metal forming press

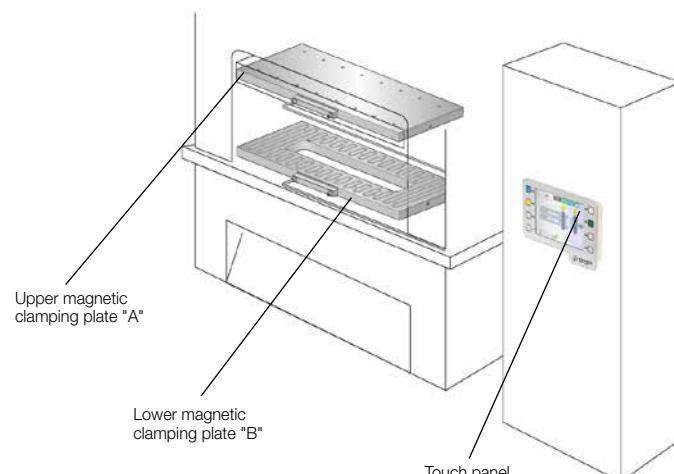


Function of the magnetic clamping plates

The electro-permanent magnetic clamping system is also firmly kept in place if the power fails. Power is only required for approx. 1 to 2 seconds to magnetize the system. After that, the clamping system works independently of any power supply. The magnetic clamping force is exclusively generated by the permanent magnets. Only when the mould is unclamped is electrical energy required again (1–2 seconds) to demagnetize the clamping plate. An existing AlNiCo magnet in the core is re-polarized by a current pulse. This magnet affects the magnetic field and relocates it completely to the interior of the magnetic clamping plate (demagnetized) or approx. 20 mm outside the plate (magnetized).

Demagnetized

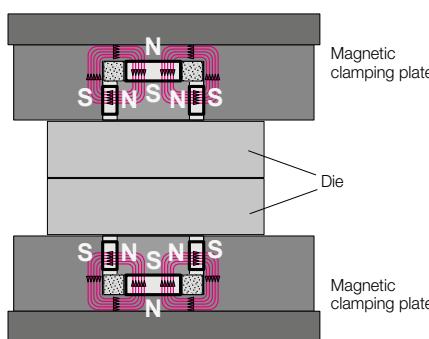


Magnetized

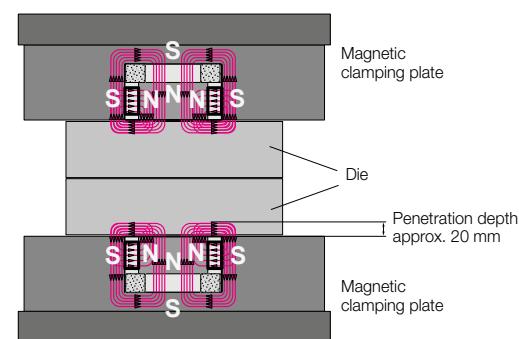

Available as an option:


- Control of external roller or ball bars
- Log files and all parameters stored on SD card
- Remote access via VPN, Ethernet, CAN-BUS, or RS485 protocol
- Higher operating temperature up to 230 °C
- When using R-MAG long poles:
 - With clamping force display (flux sensors in the plate)
 - Replaceable magnetic poles (without grinding)

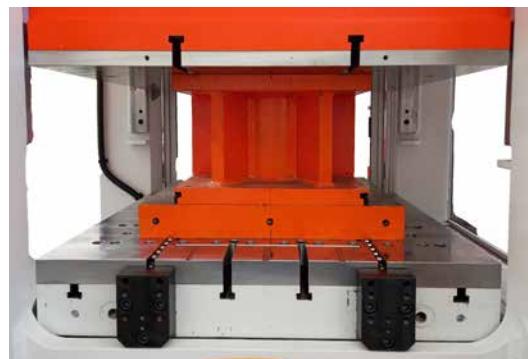

R-MAG long pole technology



R-MAG square pole technology



Replacement of long poles

The long poles are pre-assembled and plugable, allowing for easy replacement of the magnetic poles on site. Römhled offers you the option of replacing a (single) defective magnetic pole on site. This reduces system downtime.

pair is necessary. The operator at the machine must confirm these processes. The buttons remain functional even if the touchscreen display is defective.



User-friendly R-MAG control and touch panel

The 8-inch touchscreen is easy to read, sturdy and ideally suited for use on machines and systems. The housing has a LAN connection and/or an SD card slot. The display shows the status of the device and the available functions. The current clamping situation is always indicated and changes colour depending on the system status: red for important alarms and messages, orange/yellow for secondary problems, green for validation, and grey for basic functions.


Multiple access levels allow for different permissions for the operator. To ensure safety and traceability of use, a unique operator ID and password are created.

The remote access function uses a VNC protocol. This enables remote diagnosis by our ROEMHELD engineers. Even if the touchscreen is defective, all functions are available on the service screen. This allows for remote troubleshooting or a system reset before on-site re-



R-MAG-P Magnetic Clamping System for Injection Moulding Machines

Operating temperature up to 100 °C (150 °C optional)

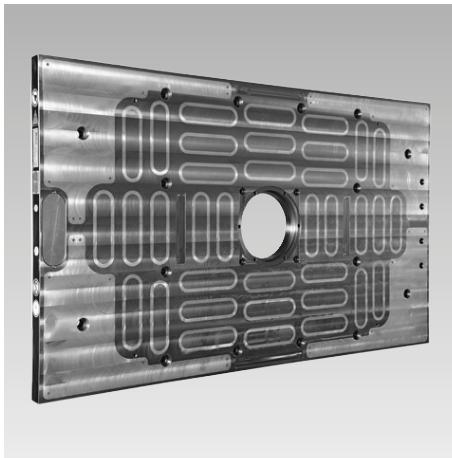

Advantages

- **QUICK** – Dies are clamped in one second at the touch of a button
- **PROFITABLE** – Setup cost optimization from die change that takes only a few minutes
- **FLEXIBLE** – Die standardization no longer required
- **ERGONOMIC** – Safe die handling with ease
- **RELIABLE** – Distortion-free and full-surface retention force even if power fails – with exchangeable poles in long pole technology
- **SAFE** – Various sensors monitor the entire clamping cycle
 - with clamping force display in long pole technology

OUR HIGHLIGHTS

Long pole technology with:

- Extremely high clamping forces
- Clamping force display
- Interchangeable magnetic poles (without grinding)
- All-metal surface

Application

R-MAG-P magnetic clamping systems are primarily used for automatic clamping of different moulds on plastic injection moulding machines.

Description

With magnetic clamping systems, the moulds are magnetically clamped or unclamped at the push of a button within a few seconds.

Since permanent magnets generate the force of the magnetic clamping plates, electric clamping is only required to magnetize the plates.

The magnetic clamping plates are de-energized in clamped condition and thus absolutely safe in case of power failure.

Additionally, the complete clamping cycle is monitored by different sensors, thus guaranteeing reliable die clamping.

Scope of system and delivery

R-MAG-P magnetic clamping systems are delivered as complete clamping systems with all required system components. The essential components of a system are:

- two magnetic clamping plates
- electric control in a splash-proof control box
- modern 8" colour touch panel
- required electrical connection cables

Customised versions

All R-MAG magnetic clamping systems are customized and manufactured to meet specific requirements.

For example, the size and pole technology of the magnetic clamping plates are selected according to the application and the machine.

Please contact us.


High safety standard thanks to:

- Inductive position monitoring of the die contact (switching distance 0.2 mm, adjustable)
- Redundant system with additional "flux sensor"
- Even the smallest die movements are monitored and reported
- Monitoring of correct magnetisation/power contacts
- Permanent temperature monitoring in the plate (overload protection)
- Standard interface according to EN 201/289 and Euromap

Basic technical data

| | | |
|--------------------------------------|-----------------------------|--------------------|
| Surface of the magnetic plate | Metallic, smooth and sturdy | |
| Size of the magnetic clamping plates | Customised | |
| Pole technology | Long pole and square pole | |
| Plate thickness | | |
| Long pole <input type="checkbox"/> | [mm] | 55 |
| Square pole <input type="checkbox"/> | [mm] | 38 or 55 |
| Max. temperature | [°C] | 100 (150 optional) |
| Magnetic retention force (per pole) | | |
| Long pole 232 x 68 mm | [kN] | 21 (2100 kg) |
| Square pole 55 x 55 mm | [kN] | 2 (200 kg) |
| Magnetic penetration depth | [mm] | 20 |


Installation on an injection moulding machine

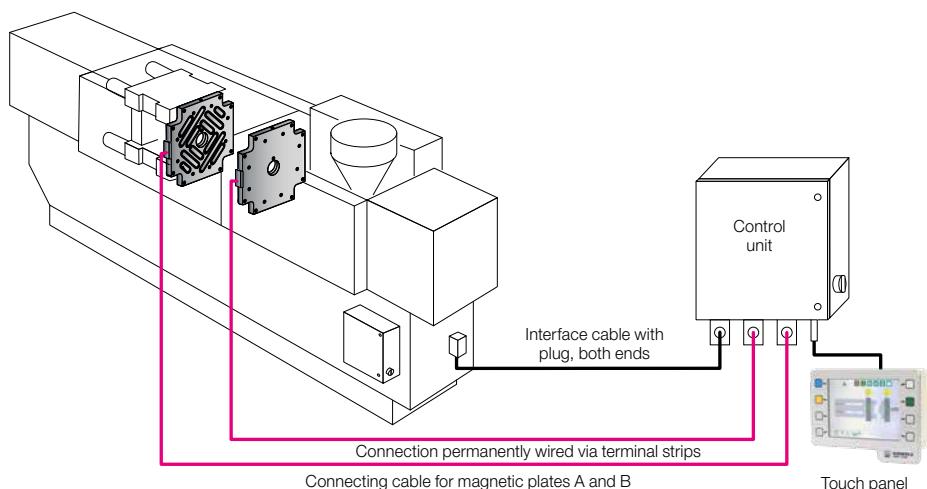


Function of the magnetic clamping plates

The electro-permanent magnetic clamping system is also firmly kept in place if the power fails. Power is only required for approx. 1 to 2 seconds to magnetize the system. After that, the clamping system works independently of any power supply. The magnetic clamping force is exclusively generated by the permanent magnets. Only when the mould is unclamped is electrical energy required again (1-2 seconds) to demagnetize the clamping plate. An existing AlNiCo magnet in the core is re-polarized by a current pulse. This magnet affects the magnetic field and relocates it completely to the interior of the magnetic clamping plate (demagnetized) or approx. 20 mm outside the plate (magnetized).

Demagnetized

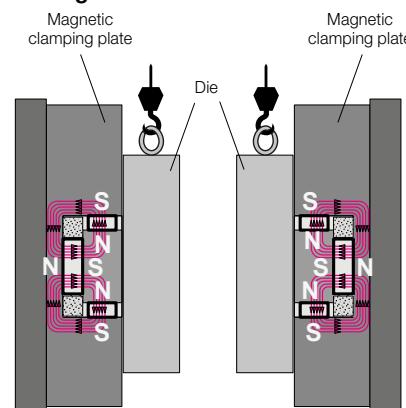

Magnetized

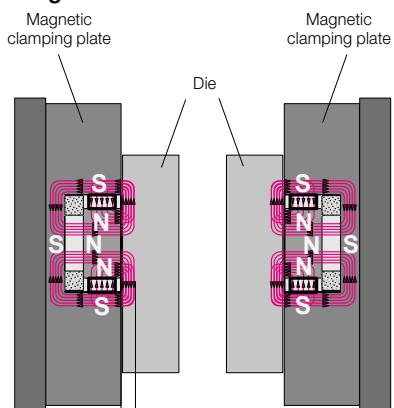

Penetration depth
approx. 20 mm


Available as an option:

- Log files and all parameters stored on SD card
- Remote access via VPN, Ethernet, CAN-BUS, or RS485 protocol
- Higher operating temperature up to 230 °C
- When using R-MAG long poles:
 - With clamping force display (flux sensors in the plate)
 - Replaceable magnetic poles (without grinding)



R-MAG-P, with long poles for injection moulding machines

R-MAG long pole technology



R-MAG square pole technology



R-MAG-P, with square poles for injection moulding machines up to 300 t

User-friendly R-MAG control and touch panel

The 8-inch touchscreen is easy to read, sturdy and ideally suited for use on machines and systems. The housing has a LAN connection and/or an SD card slot. The display shows the status of the device and the available functions. The current clamping situation is always indicated and changes colour depending on the system status: red for important alarms and messages, orange/yellow for secondary problems, green for validation, and grey for basic functions.

Multiple access levels allow for different permissions for the operator. To ensure safety and traceability of use, a unique operator ID and password are created.

The remote access function uses a VNC protocol. This enables remote diagnosis by our ROEMHELD engineers. Even if the touchscreen is defective, all functions are available on the service screen. This allows for remote trouble-

shooting or a system reset before on-site repair is necessary. The operator at the machine must confirm these processes. The buttons remain functional even if the touchscreen display is defective.





R-MAG-R Magnetic Clamping System for Rubber Moulding Presses

Operating temperature up to 230 °C



Vertical application



Horizontal application

Application

R-MAG-P magnetic clamping systems are primarily used for automatic clamping of different dies on rubber presses.

Description

With magnetic clamping systems, the moulds are magnetically clamped or unclamped at the push of a button within a few seconds. Since permanent magnets generate the force of the magnetic clamping plates, electric clamping is only required to magnetize the plates.

The magnetic clamping plates are de-energized in clamped condition and thus absolutely safe in case of power failure. Additionally, the complete clamping cycle is monitored by different sensors, thus guaranteeing reliable die clamping.

Scope of system and delivery

R-MAG-R magnetic clamping systems are delivered as complete clamping systems with all required system components. The essential components of a system are:

- two magnetic clamping plates
- electric control in a splash-proof control box
- A manual remote control
- required electrical connection cables

Customised versions

All R-MAG magnetic clamping systems are customized and manufactured to meet specific requirements.

For example, the size and pole arrangement of the magnetic clamping plates are selected according to the application and the machine. Please contact us.

Advantages

- **QUICK** – Dies are clamped in one second at the touch of a button
- **PROFITABLE** – Setup cost optimization from die change that takes only a few minutes
- **FLEXIBLE** – Die standardization no longer required
- **ERGONOMIC** – Safe die handling with ease
- **RELIABLE** – Distortion-free and full-surface retention force even if power fails
- **SAFE** – Various sensors monitor the entire clamping cycle

Safety functions


- The inductive limit switch checks for form-fit contact of the die and guarantees clamping without force loss.
- Sensors inside the coils register the slightest die movements due to changes in the magnetic flow between the magnetic clamping plate and die.
- A temperature sensor in the magnetic clamping plate prevents overheating and thus damage to the system.

Technical Data

| Size of the magnetic clamping plates | Customised |
|--------------------------------------|-----------------------|
| Pole technology | Long pole |
| Max. temperature | [°C] |
| Effective magnetic force | [kg/cm ²] |
| Magnetic penetration depth | [mm] |
| Plate thickness | [mm] |

* force directly on the magnet


Installation on a rubber press

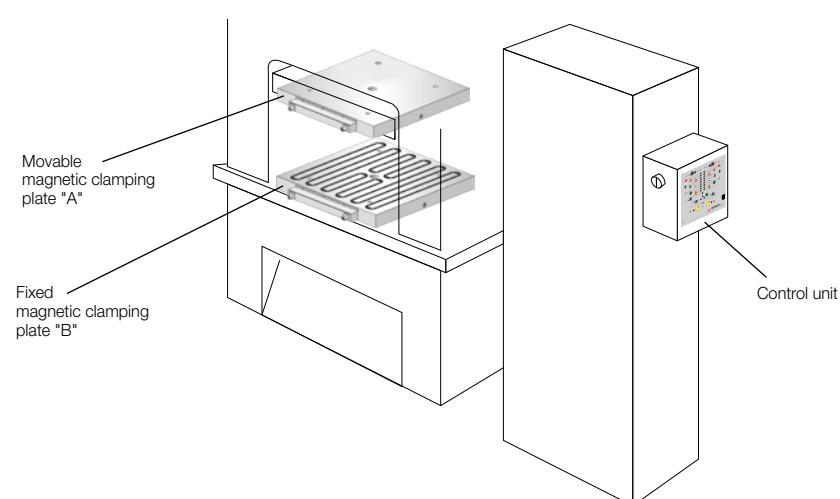


Function of the magnetic clamping plates

The electro-permanent magnetic clamping system is also firmly kept in place if the power fails. Power is only required for approx. 1 to 2 seconds to magnetize the system. After that, the clamping system works independently of any power supply. The magnetic clamping force is exclusively generated by the permanent magnets. Only when the mould is unclamped is electrical energy required again (1–2 seconds) to demagnetize the clamping plate. An existing AlNiCo magnet in the core is reversed in polarity by a current pulse. This magnet affects the magnetic field and relocates it completely to the interior of the magnetic clamping plate (demagnetized) or approx. 20 mm outside the plate (magnetized).

Demagnetized

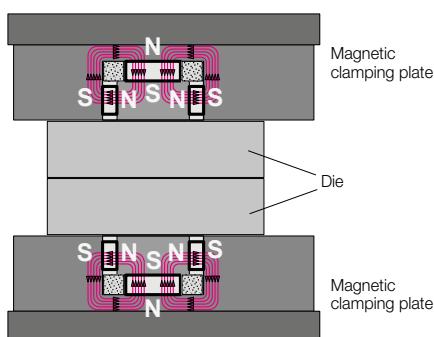

Magnetized

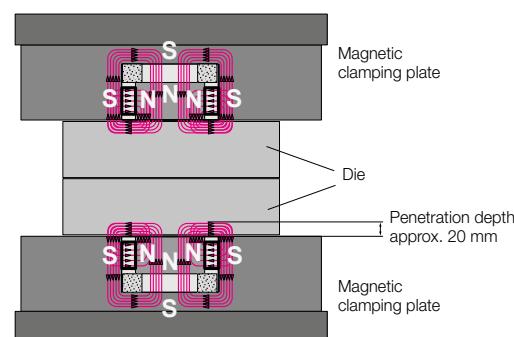

Magnetic clamping plate design


1. The fixing grid is designed to align with the existing bore holes to the greatest extent possible.
2. The mechanical limit switch checks for perfect contact of the die and then releases the magnetization.
3. Optional slots for roller or ball bars (also part of the ROEMHELD Group product range) can be inserted in the lower magnetic clamping plate to simplify die change.



Other safety devices in the plate:

- Sensors inside the coils respond to induction and report the slightest die movements.
- A temperature sensor in the magnetic clamping plate prevents overheating and thus damage to the system.

Power concentration of long pole technology

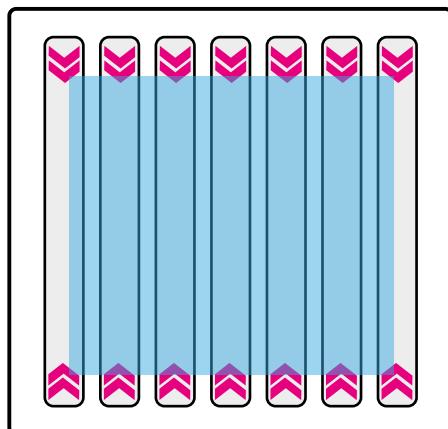

The magnetic field lines of the partially covered poles act in addition to the completely covered poles on the die and enable safe clamping of the smallest dies.

Electric control



- Highest safety standards as per EN201 and EN289
- Control via remote control or machine panel
- Simple error diagnosis via readout
- Easy and safe operation
- IP54 splash-proof
- Error code indication on the LCD display
- Lacquering in preferred colour
- Integration via EUROMAP interface
- Easy to maintain with exchangeable master module
- Key switch protects from unauthorized operation



R-MAG-F Magnetic Clamping Systems for Mould Carriers and Special Applications

Operating temperature up to 100 °C



Advantages

- **QUICK** – Dies are clamped in one second at the touch of a button
- **PROFITABLE** – Setup cost optimization from die change that takes only a few minutes
- **FLEXIBLE** – Die standardization no longer required
- **ERGONOMIC** – Safe die handling with ease
- **RELIABLE** – Distortion-free and full-surface retention force even if power fails – with exchangeable poles in long pole technology
- **SAFE** – Various sensors monitor the entire clamping cycle with clamping force display in long pole technology

OUR HIGHLIGHTS

Long pole technology with:

- Extremely high clamping forces
- Clamping force display
- Interchangeable magnetic poles (without grinding)
- All-metal surface

Application

R-MAG-F magnetic clamping systems are used primarily for the automatic clamping of different dies in mould carrier presses and in vertical special applications.

Description

With magnetic clamping systems, the moulds are magnetically clamped or unclamped at the push of a button within a few seconds. Since permanent magnets generate the force of the magnetic clamping plates, electric clamping is only required to magnetize the plates. The magnetic clamping plates are de-energized in clamped condition and thus absolutely safe in case of power failure.

Additionally, the complete clamping cycle is monitored by different sensors, thus guaranteeing reliable die clamping.

Scope of system and delivery

R-MAG-F magnetic clamping systems are delivered as complete clamping systems with all required system components. The essential components of a system are:

- two magnetic clamping plates
- electric control in a splash-proof control box
- modern 8" colour touch panel
- required electrical connection cables

Customised versions

All R-MAG magnetic clamping systems are customized and manufactured to meet specific requirements.

For example, the size and pole technology of the magnetic clamping plates are selected according to the application and the machine. Please contact us.

High safety standard thanks to:

- Inductive position monitoring of the die contact (switching distance 0.2 mm, adjustable)
- Redundant system with additional "flux sensor"
- Even the smallest die movements are monitored and reported
- Monitoring of correct magnetisation/power contacts
- Permanent temperature monitoring in the plate (overload protection)
- Standard interface according to EN 201/289 and Euromap

Technical Data


| | | |
|---|-----------------------------|--------------|
| Surface of the magnetic plate | Metallic, smooth and sturdy | |
| Size of the magnetic clamping plates | Customised | |
| Pole technology | Long pole and square pole | |
| Plate thickness | | |
| Long pole <input checked="" type="checkbox"/> | [mm] | 55 |
| Square pole <input type="checkbox"/> | [mm] | 38 or 55 |
| Max. temperature | [°C] | 100 |
| Magnetic retention force (per pole) | | |
| Long pole 232 x 68 mm | [kN] | 21 (2100 kg) |
| Square pole 55 x 55 mm | [kN] | 2 (200 kg) |
| Magnetic penetration depth | [mm] | 20 |




Function of the magnetic clamping plates

The electro-permanent magnetic clamping system is also firmly kept in place if the power fails. Power is only required for approx. 1 to 2 seconds to magnetize the system. After that, the clamping system works independently of any power supply. The magnetic clamping force is exclusively generated by the permanent magnets. Only when the mould is unclamped is electrical energy required again (1–2 seconds) to demagnetize the clamping plate. An existing AlNiCo magnet in the core is re-polarized by a current pulse. This magnet affects the magnetic field and relocates it completely to the interior of the magnetic clamping plate (demagnetized) or approx. 20 mm outside the plate (magnetized).

Demagnetized

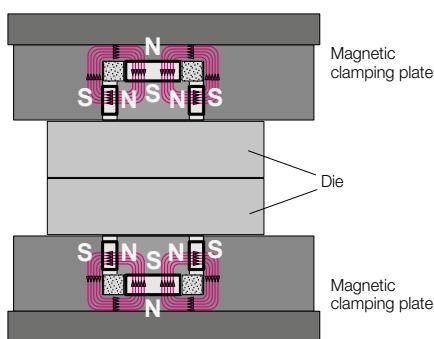

Magnetized

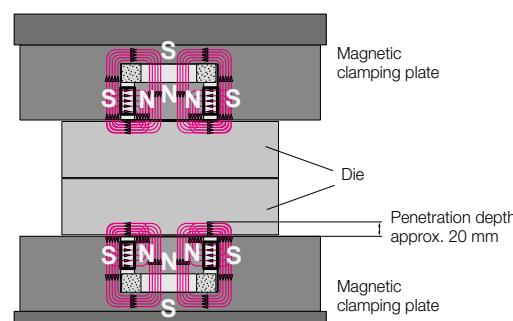

Available as an option:


- Control of external roller or ball bars
- Log files and all parameters stored on SD card
- Remote access via VPN, Ethernet, CAN-BUS, or RS485 protocol
- Higher operating temperature up to 230 °C
- When using R-MAG long poles:
 - With clamping force display (flux sensors in the plate)
 - Replaceable magnetic poles (without grinding)



R-MAG long pole technology



R-MAG square pole technology



Replacement of long poles

The long poles are pre-assembled and plugable, allowing for easy replacement of the magnetic poles on site. Römhild offers you the option of replacing a (single) defective magnetic pole on site. This reduces system downtime.

on the service screen. This allows for remote troubleshooting or a system reset before on-site repair is necessary. The operator at the machine must confirm these processes. The buttons remain functional even if the touchscreen display is defective.




User-friendly R-MAG control and touch panel

The 8-inch touchscreen is easy to read, sturdy and ideally suited for use on machines and systems. The housing has a LAN connection and/or an SD card slot. The display shows the status of the device and the available functions. The current clamping situation is always indicated and changes colour depending on the system status: red for important alarms and messages, orange/yellow for secondary problems, green for validation, and grey for basic functions.


Multiple access levels allow for different permissions for the operator. To ensure safety and traceability of use, a unique operator ID and password are created.

The remote access function uses a VNC protocol. This enables remote diagnosis by our ROEMHELD engineers. Even if the touchscreen is defective, all functions are available




R-MAG-D Magnetic Clamping Systems for Die Casting Machines

Operating temperature up to 200 °C

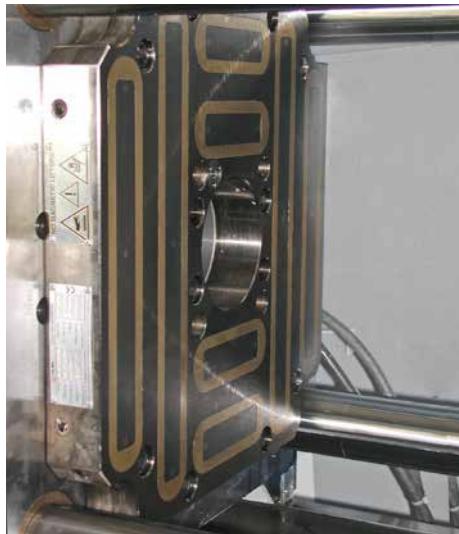

Ejector side

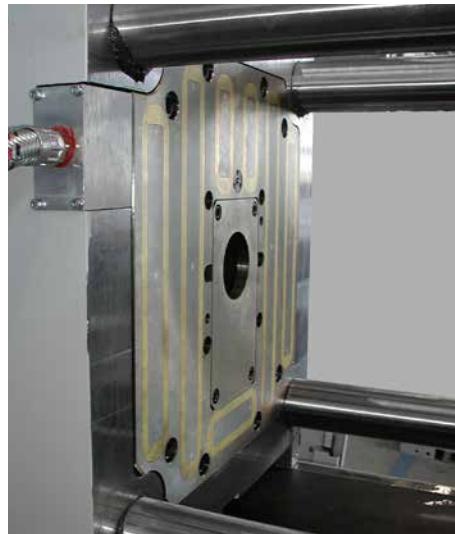

Nozzle side

Application

R-MAG-D magnetic clamping systems are primarily used for automatic clamping of different dies on rubber presses.

Description

With magnetic clamping systems, the moulds are magnetically clamped or unclamped at the push of a button within a few seconds.

Since permanent magnets generate the force of the magnetic clamping plates, electric clamping is only required to magnetize the plates.

The magnetic clamping plates are de-energized in clamped condition and thus absolutely safe in case of power failure.

Additionally, the complete clamping cycle is monitored by different sensors, thus guaranteeing reliable die clamping.

Scope of system and delivery

R-MAG-D magnetic clamping systems are delivered as complete clamping systems with all required system components. The essential components of a system are:

- two magnetic clamping plates
- electric control in a splash-proof control box
- A manual remote control
- required electrical connection cables

Advantages

- **QUICK** – Dies are clamped in one second at the touch of a button
- **PROFITABLE** – Setup cost optimization from die change that takes only a few minutes
- **FLEXIBLE** – Die standardization no longer required
- **ERGONOMIC** – Safe die handling with ease
- **RELIABLE** – Distortion-free and full-surface retention force even if power fails
- **SAFE** – Various sensors monitor the entire clamping cycle


Safety functions

- The inductive limit switch checks for form-fit contact of the die and guarantees clamping without force loss.
- Sensors inside the coils register the slightest die movements due to changes in the magnetic flow between the magnetic clamping plate and die.
- A temperature sensor in the magnetic clamping plate prevents overheating and thus damage to the system.

Technical Data

| | |
|--------------------------------------|----------------------------|
| Size of the magnetic clamping plates | Customised |
| Pole technology | Long pole |
| Max. temperature | [°C] 200 |
| Effective magnetic force | [kg/cm ²] 5–12 |
| Magnetic penetration depth | [mm] 20 |
| Plate thickness | [mm] min. 55 |

* force directly on the magnet

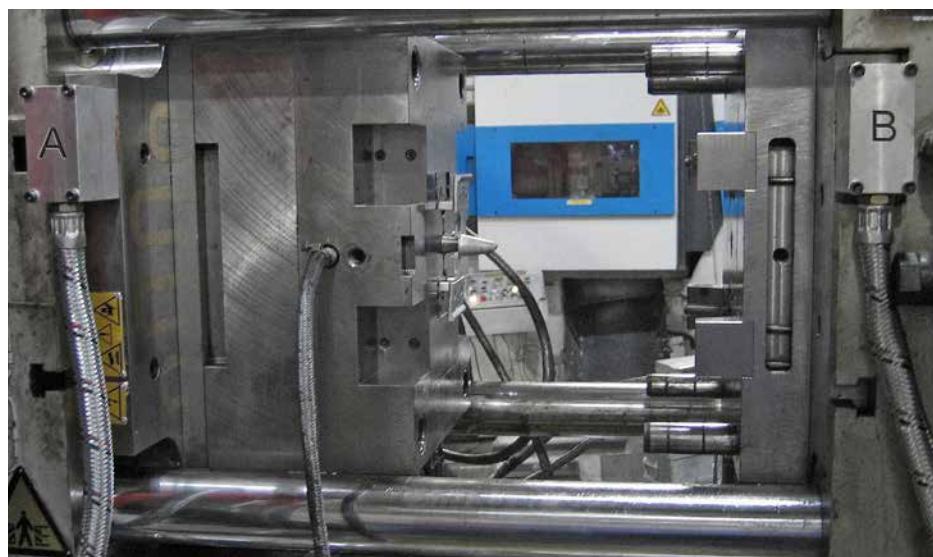


Magnetic clamping system integrated in a die casting machine


Function of the magnetic clamping plates

The electro-permanent magnetic clamping system is also firmly kept in place if the power fails. Power is only required for approx. 1 to 2 seconds to magnetize the system. After that, the clamping system works independently of any power supply. The magnetic clamping force is exclusively generated by the permanent magnets. Only when the mould is unclamped is electrical energy required again (1–2 seconds) to demagnetize the clamping plate. An existing AlNiCo magnet in the core is re-polarized by a current pulse. This magnet affects the magnetic field and relocates it completely to the interior of the magnetic clamping plate (demagnetized) or approx. 20 mm outside the plate (magnetized).

Demagnetized

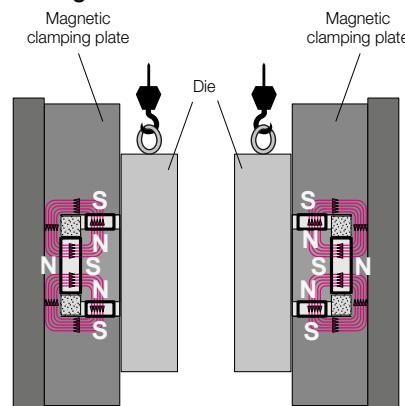

Magnetized

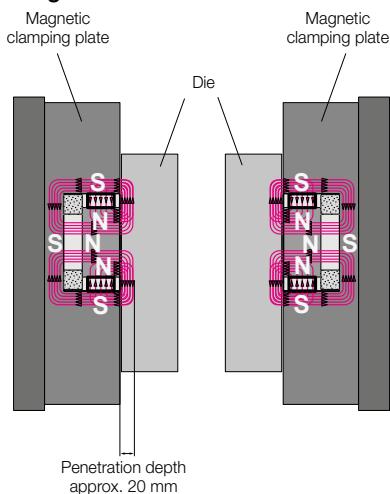

Magnetic clamping plate design


1. The fixing grid is designed to align with the existing bore holes to the greatest extent possible.
2. The mechanical limit switch checks for perfect contact of the die and then releases the magnetization.
3. Optional slots for roller or ball bars (also part of the ROEMHELD Group product range) can be inserted in the lower magnetic clamping plate to simplify die change.



Other safety devices in the plate:

- Sensors inside the coils respond to induction and report the slightest die movements.
- A temperature sensor in the magnetic clamping plate prevents overheating and thus damage to the system.

Power concentration of long pole technology

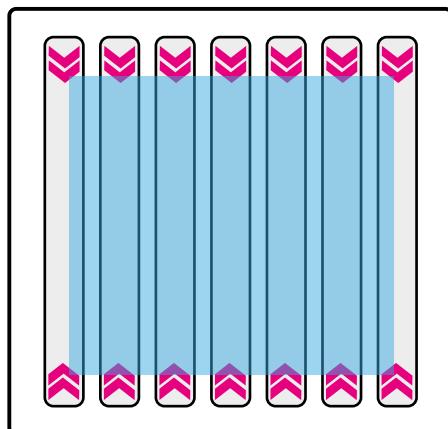

The magnetic field lines of the partially covered poles act in addition to the completely covered poles on the die and enable safe clamping of the smallest dies.

Electric control




- Highest safety standards as per EN201 and EN289
- Control via remote control or machine panel
- Simple error diagnosis via readout
- Easy and safe operation
- IP54 splash-proof
- Error code indication on the LCD display
- Lacquering in preferred colour
- Integration via EUROMAP interface
- Easy to maintain with exchangeable master module
- Key switch protects from unauthorized operation

Insulation plates

The insulation plates are mounted between the machine table and the magnetic clamping plates. They enable uniform heat distribution and prevent heat from passing from the die to the machine.

The insulation plates are available with a thickness of 6 and 10 mm.

Since the magnetic clamping plates are equipped with firmly mounted insulation plates, this investment is not required for all new dies.



Eccentric ring

Too many tool changes can wear the centring on the magnetic clamping plate. An exchangeable centring ring guarantees the precise centring of the dies without exchanging the complete clamping system.



Wedge clamping elements in hydraulic or electric versions

Data sheet WZ 2.2450



Data sheet WZ 2.2451



Data sheet WZ 5.2670



Roller or ball bars

Roller and ball bars in the lower magnetic clamping plate allow easy and trouble-free die change and prevent damages to the surface.

See roller and ball bar configurator:

<https://www.roemheld-gruppe.de/productconfigurator/?lang=en>




Driven die changing systems

Data sheet WZ 8.18362



Combination of push chain direct system with standard carrying console

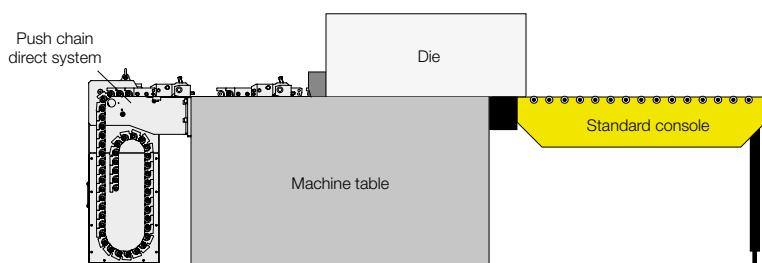

Die changing carts and carrying consoles


Data sheet WZ 8.8900



Data sheet WZ 8.8904



Data sheets WZ 8.18350 – 8.18354



Magnetic clamping systems also available for:

- Sheet metal forming
- Plastics industry
- Rubber moulding presses
- Mould carriers
- Die casting machines



Discover the
QDC app now!

<https://wz-app.roemheld.de/en/home>



Argentina

Nelso Ferreyra S.R.L.
Ing. Huergo 1387
Parque Industrial-C.C. No. 144
C.P. 2400 San Francisco-Córdoba
Phone +54 3564 420755
ventas@dri-lex.com
www.dri-lex.com

Australia

Romheld Automation Pty Ltd.
Unit 7, 62-66 Turner Road
Smeaton Grange, NSW 2567
Phone +61 29721 1799
sales@romheld.com.au
www.romheld.com.au

Belgium

ITB Benelux BV
Minervum 7215
4817 ZJ Breda
Phone +31 162 43 1691
info@itb-bv.nl
www.itb-bv.nl

Brazil

Sanposs TSCI Ltda.
Rua Cândia nº 65 – Jardim do Mar
São Bernardo do Campo – São Paulo,
09726-220
Phone +55 11 4126 6711
sanposs@sanposs.com.br
www.sanposs.com.br

China

Roemheld Production Systems (Nanjing) Co., Ltd.
27-1 Guangyue Road, Qixia District
210033 Nanjing
Phone +86 2585766862
info@roemheld-china.com
www.roemheld.com

Denmark

Duroc Machine Tool Danmark
Ribevej 14
8940 Randers SV
Phone +45 86 412011
info.machinetool.dk@duroc.com
www.duroc.com

France

Roemheld S.A.S.
2 rue Parc des Vergers
91250 TIGERY
Phone +33 1 64 97 97 40
info@roemheld.fr
www.roemheld.fr

Finland

Tanreco Oy
Konepajankatu 11
11710 Riihimäki
Phone +358 19 77 485
myynti@tanreco.fi
www.tanreco.fi

Great Britain

ROEMHELD UK Ltd.
Unit 9 B Village - Endeavour Park
Baker Road - Nelson Park West
Cramlington NE23 1XA
Phone +44 1670 281400
sales@roemheld.co.uk
www.roemheld.co.uk

India

Oriental Engineering Works Pvt. Ltd.
Oriental Crossing, Industrial Area
Yamuna Nagar 135 001 (Haryana)
Phone +91 1732 25 1750
info@oewin.com
www.oewin.com

Italy

CAMAR S.p.A.
Via Genova 58/A
10098 Cascine Vica-Rivoli (TO)
Phone +39 011 959.16.26 r.a
info@camarspa.it
www.camarspa.it

Japan

Roemheld · Halder Co., Ltd.
2-14-8 Yushima, Bunkyo-ku
Tokyo 113-0034
Phone +81 03 6284 2501
info@roemheld-halder.co.jp
www.roemheld-halder.co.jp

Netherlands

ITB Benelux BV
Minervum 7215
4817 ZJ Breda
Phone +31 162 43 1691
info@itb-bv.nl
www.itb-bv.nl

Norway

Duroc Machine Tool AS
Anolitveien 7
1401 Ski
Phone +47 64 91 4880
info.machinetool.no@duroc.com
www.duroc.com

Austria

B-S-D Spanntechnik GmbH
Sportplatzstraße 31
3385 Markersdorf
Phone +43 2749 72870
office@bsdaustria.com
www.die-spanntechniker.at

Poland

INMET-BTH®
ul. Jasna 1–5
43 –190 Mikołów
Phone +48 327384949
Mobil +48 604 268 726
biuro@roemheld.pl
www.roemheld.pl

Portugal

DRIFTEC, Lda
Rua Adelino Amaro da Costa, nº 330
4470-225 Maia
Phone +351 962 502614
driftec@driftec.pt
www.driftec.pt

Romania

SC PARCON FREIWALD SRL
Str. Depozitelor Nr. 22
540240 Târgu Mureş
Phone +40 365 410572
comert@parconfreiwald.ro
www.parconfreiwald.ro

Russia

DIFLEX LLC
3 Okskaya Naberezhnaya, Dzerzhinsk
606030 Nizhniy Novgorod Region
Phone +7 831 228 7455
info@roemheld.ru
www.roemheld.ru

Sweden

Duroc Machine Tool AB
Snedgatan 1
342 50 Vislanda
Phone +46 8630 2300
info.machinetool.se@duroc.com
www.duroc.com

Switzerland

FN Niederhauser AG
Spanntechnik und Systeme
Allmend 39, 6204 Sempach
Phone +41 41 3405075
info@niederhauser.ch
www.niederhauser.ch

Singapore

Techpro Machine Tools Pte. Ltd.
Block 2021, Street 23
Bukit Batok Industrial Park A, Unit 02-190
Singapore 659526
Phone +65 6567 6677
enquiry@techpro.com.sg
www.techpro.com.sg

Slovenia

Halder norm + technik d.o.o.
Miklavška cesta 50
2311 Hoče
Phone +386 2 61 82 646
info@halder.si
www.halder.si

Spain

OBON Técnica de sujeción, S.L.
Calle B, número 10
Polígono Industrial Can Xinxà
08348 Cabrils (Barcelona)
Phone +34 93 576 87 10
info@obons.es

South Africa

Stefan Hulme Clamping Technology
Bokmakierie Street, Theresapark,
Villa Casia Pretoria
Phone +27 82 478 9111
stefan@ctza.co.za
www.clampingtechnology.co.za

South Korea

Halder Roemheld Korea Ltd.
B-1405 Woolim Lions Valley 2 Cha, 146-8
Sangdaewon-dong, Jungwon-gu
Seongnam-si, Gyunggi-do, South Korea
Phone +82 31 4554762
info@halder-roemheld.co.kr
www.halder-roemheld.co.kr

Taiwan

Jimmore International Corp.
120-2 Sec. 2 Fusing Road,
South District
Taichung City 40252 · Taiwan
Phone +886 4 2260 5352
trade@jimmore.com.tw
www.jimmore.com.tw

Thailand

Krasstec Co., Ltd.
1205 Rama 9 Soi 55
Rama 9 Road
Suan Luang - Bangkok 10250
Phone +66273 21144
krasscom@krasstec.com
www.krasstec.com

Czech Republic

Presston spol s.r.o.
Božetěchova 50
61200 Brno
Phone +420 541 248 853
presston@preston.cz
www.preston.cz

Turkey

Hidkom Mühendislik-Mümessilik Ltd.
Organize Sanayi Bölgesi
75, Yil Cd. Demirciler Sit. B Blok No.2
16220 Nilüfer / Bursa
Phone +90 224 2438292
hidkom@hidkom.com
www.hidkom.com

Hungary

GIMEX Hidraulika Kft
Selyem utca 1
9025 Győr
Phone +36 96 525588
info@gimex.hu
www.gimex.hu

USA / Canada / Mexiko

ROEMHELD North America
927 Horan Drive
Fenton, Missouri 63026
Phone +1 636 386 8022
info@roemheld-usa.com
www.roemheld-usa.com




Centre/North

Benedikt Niklas

Area Manager QDC/QMC

✉ +49 172 629 7070

✉ b.niklas@roemheld.de

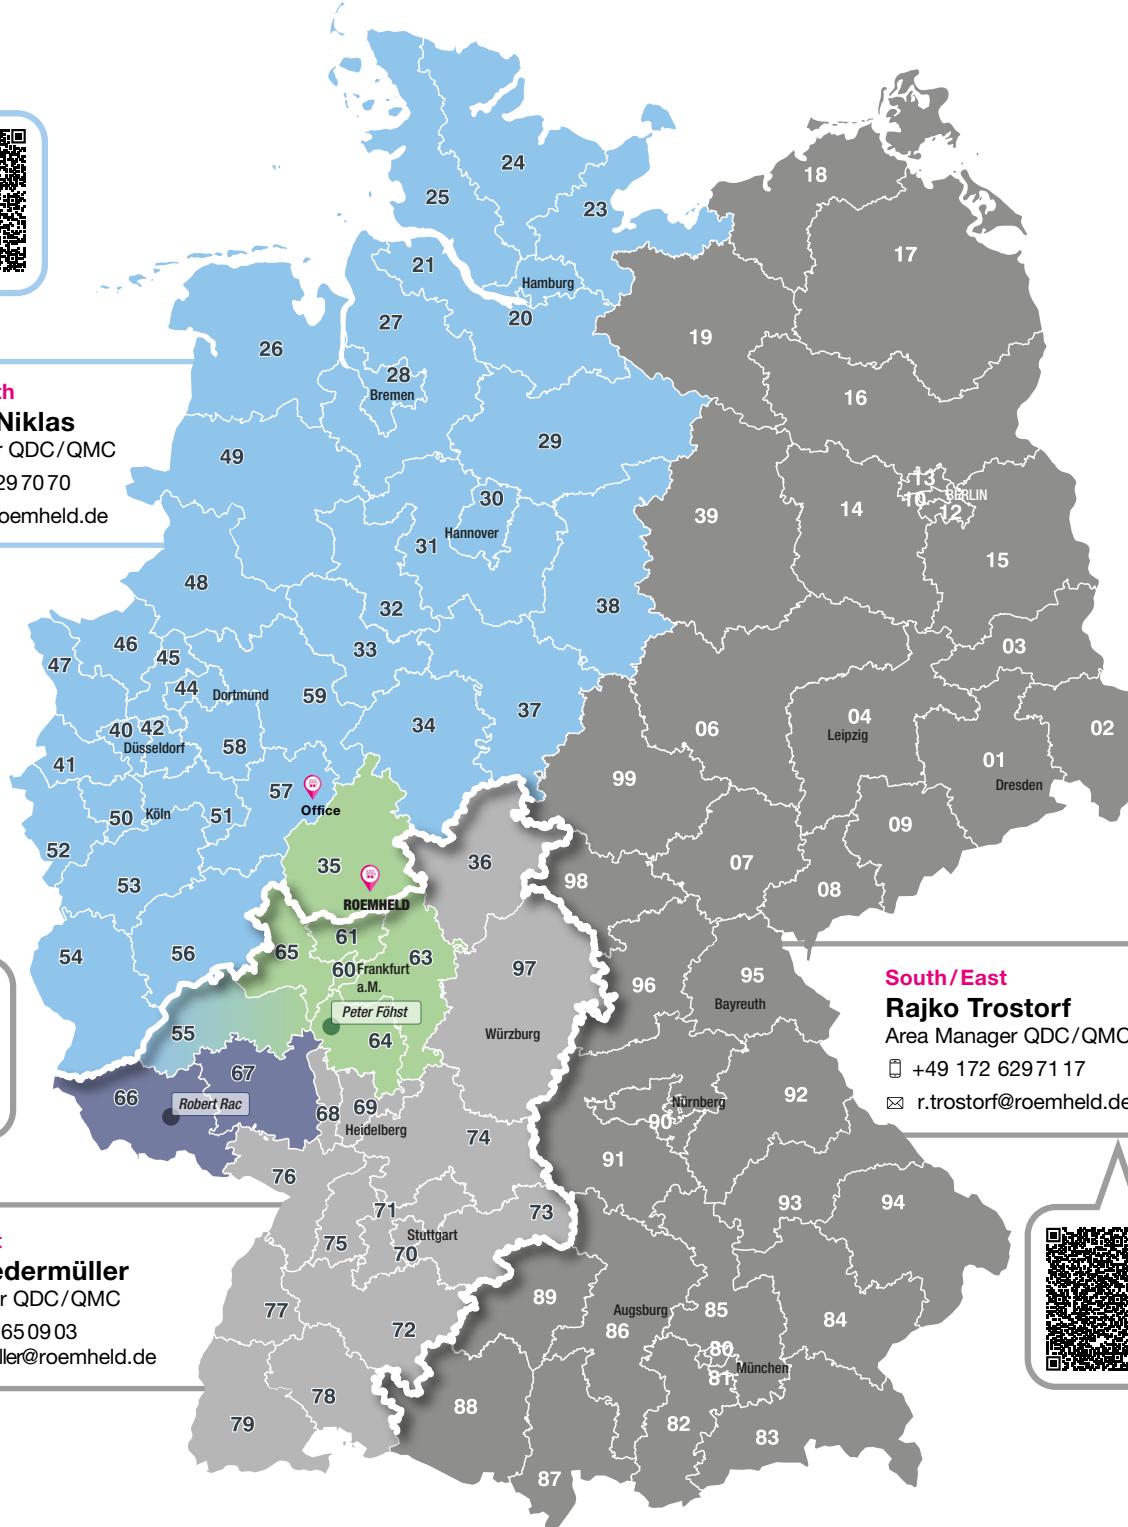

South/West

Jonas Niedermüller

Area Manager QDC/QMC

✉ +49 172 265 09 03

✉ j.niedermueller@roemheld.de

South/East

Rajko Trostorf

Area Manager QDC/QMC

✉ +49 172 629 7117

✉ r.trostorf@roemheld.de



Römhled GmbH

Friedrichshütte

Römhledstraße 1–5

35321 Laubach, Germany

Phone: +49 6405 89-0

info@roemheld.de

www.roemheld.com



Römhled GmbH

Friedrichshütte

Die Clamping and Changing Technology

Office:

Auf der Landeskron 2

57234 Wilnsdorf-Wilden, Germany

Phone: +49 2739 4037-0

info@roemheld.de

wz.roemheld.com

Contact Person for Die Clamping and Changing Systems

Area: Centre / North

35300–35305
35321–35327
35390–35649
35745–35767
35781–35999
55000–55218
55239–55283
55294–55411
55435–55437
60–65

20–34
35288
35315
35329
35683–35719
35768
36–38
40–59

Peter Föhst

Römhled GmbH Friedrichshütte
Römhledstr. 1-5
35321 Laubach

✉ +49 172 672 67 80
✉ p.foehst@roemheld.de

Benedikt Niklas

Römhled GmbH Friedrichshütte
Office:
Auf der Landeskron 2
57234 Wilnsdorf-Wilden

✉ +49 172 629 70 70
✉ b.niklas@roemheld.de

Area: East

01–09
1
8
39
90000–96999
98–99

Rajko Trostorf

Römhled GmbH Friedrichshütte
Office:
Auf der Landeskron 2
57234 Wilnsdorf-Wilden

✉ +49 172 629 71 17
✉ r.trostorf@roemheld.de

Area: South/West

36
70–79
68
69
97

Jonas Niedermüller

Römhled GmbH Friedrichshütte
Office:
Auf der Landeskron 2
57234 Wilnsdorf-Wilden

✉ +49 172 265 09 03
✉ j.niedermueller@roemheld.de

66
67

Dipl.-Ing Robert Rac

Römhled GmbH Friedrichshütte
Römhledstr. 1-5
35321 Laubach

✉ +49 172 630 31 61
✉ r.rac@roemheld.de



ROEMHELD

HILMA ■ STARK

Everything for a quick and safe die change on presses, machines and plants

from storage, transport and insertion to positioning and clamping of dies

Complete solutions from a single source!

Your advantages

- Quick die change - easy and safe
- Reduction of set-up times
- Possible automation of the die change
- Higher productivity

STORAGE RACK SYSTEMS FOR DIE STORAGE

Heavy duty shelving with integrated ball and roller bars



INSERTION CARRYING CONSOLES / ROLLER AND BALL BARS

for the movement of dies




TRANSPORT DIE CHANGING CARTS

for the safe handling
of heavy dies



POSITIONING AND CLAMPING DIE CLAMPING SYSTEMS

hydraulic, magnetic,
elektro-mechanical or mechanical

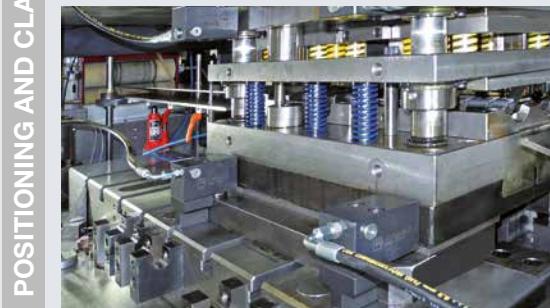

Römheld GmbH

Friedrichshütte

Römheldstraße 1–5

35321 Laubach, Germany

Tel.: +49 6405 89-0

info@roemheld.de

www.roemheld.com

Römheld GmbH

Friedrichshütte

Die Clamping and Changing Technology

Office:

Auf der Landeskron 2

57234 Wilnsdorf-Wilden, Germany

Tel.: +49 2739 4037-200

info@roemheld.de

wz.roemheld.com